


fitt b-active rigid

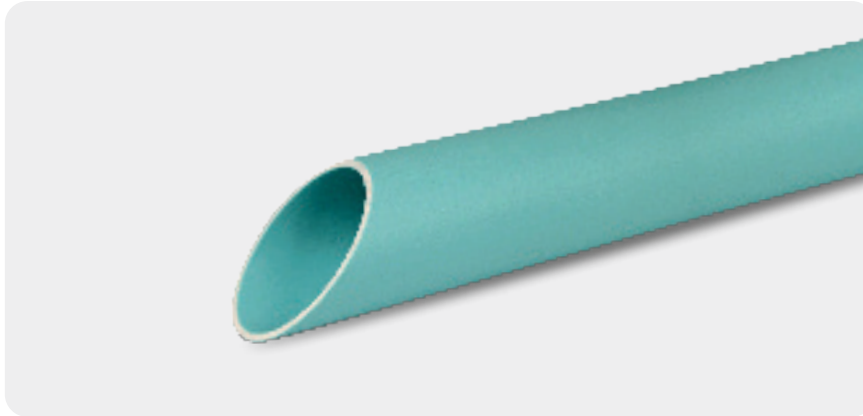

用于游泳池和水疗池地下压力系统的硬质管道。

FITT B-Active Rigid硬管可抵御因搬运不慎引起的冲击,并能适应地面运动,从建设阶段到使用全过程为游泳池提供保障。

结构:采用Shock Wave技术制造的PVC-A硬质管道,具有三层结构,确保其抗冲击性,符合EN ISO 1452标准规定的测试方法。

使用温度:0°C / +40°C

- 即使在低温下也具有高抗冲击性。
- 内部和外部耐磨性高。
- 抗微生物和抗氯能力高。
- 高耐用性。

Pipe suitable for swimming pool and whirlpool underground pressurized systems.

Resistant to careless handling shocks and adaptable to movements in the soil, FITT B-Active Rigid makes the pool safe and protected from damage during construction and subsequent use.

Structure: PVC-A pipe manufactured with Shock Wave technology and featuring a 3-layer construction that guarantees shock resistance, in full compliance with the test requirements of the EN ISO 1452 standard.

Temperature of use: 0°C / +40°C

- High shock resistance, even at low temperatures.
- High internal and external abrasion resistance.
- High micro-organisms and chlorine resistance
- High durability.



符合REACH¹
标准
REACH¹
compliant



符合RoHS²
标准
RoHS²
compliant



无IPA³
PAH³
free



无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0.1%



MOCA - 符合欧盟第10/2011号法规
(模拟物A)

FCM - Compliant with European Regulation
10/2011 for Simulants A.

FITT B-ACTIVE RIGID

标记 | **Marking:** FITT B-ACTIVE RIGID - PVC-A - Øxx PNxx SNxx - MADE IN ITALY - 10 YEARS WARRANTY - 10 YEARS INSURANCE COVERAGE [EAN barcode]

外径 Ø external [mm]	工作压力 Working pressure [bar]	爆破压力 Bursting pressure [bar]	真空度 Vacuum [mH ₂ O]	长度 Length [m]	空心管坯长度 Socket length [mm]	数量 Quantity [pcs/pal]	数量 Quantity [pcs/pack]
50	10	30	10	4	50	126	7
50	10	30	10	2	50	252	7
50	10	30	10	1,18	-	360	24
50	16	40	10	4	50	126	7
50	16	40	10	2	50	252	7
50	16	40	10	1,18	-	360	24
63	10	25	10	4	60	90	5
63	10	25	10	2	60	180	5
63	10	25	10	1,18	-	225	15
63	16	32	10	4	60	90	5
63	16	32	10	2	60	180	5
63	16	32	10	1,18	-	225	15

时的爆破压力和工作压力23°C | Working and Bursting pressure at 23°C

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。

Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AFPS GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)

Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AFPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)