


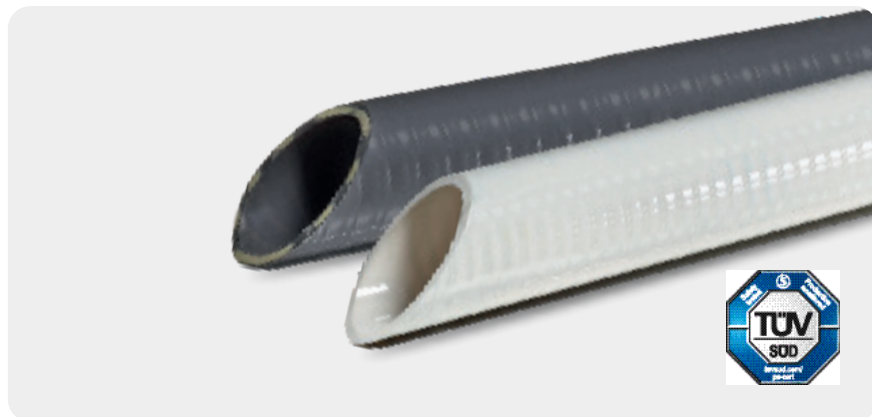

用于家庭地下游泳池的供水和抽水管道。

FITT Idroflex具有良好的柔韧性, 适合与市场  
上的接头进行粘接。

**结构:** 内外壁光滑的PVC螺旋管。

**使用温度:** -10°C / +60°C

- 经外部校准, 可以确保与粘接和压缩接头的完美粘合。
- 良好的柔韧性。
- 还有灰色可选。

**Delivery and suction hose for residential  
embedded pools.**

Offering good flexibility, FITT Idroflex is suitable  
for bonding with commercially available fittings.

**Structure:** PVC spiral hose with smooth internal  
and external surface.

**Temperature of use:** -10°C / +60°C

- Externally calibrated for perfect bonding with  
glued and compression fittings.
- Good flexibility.
- Also available in grey.



符合REACH<sup>1</sup>  
标准  
REACH<sup>1</sup>  
compliant



符合RoHS<sup>2</sup>  
标准  
RoHS<sup>2</sup>  
compliant



无IPA<sup>3</sup>  
PAH<sup>3</sup>  
free



无邻苯二甲酸盐<sup>4</sup>  
含量<0.1%  
Phthalate free<sup>4</sup>  
formulation <0.1%

## FITT IDROFLEX

标记 | Marking: FITT IDROFLEX Øxx - ISO3994 - xbar @23°C - MADE IN ITALY

| 外径<br>Ø external<br>[mm] | 颜色<br>Color | 工作压力<br>Working<br>pressure<br>[bar] | 爆破压力<br>Bursting<br>pressure<br>[bar] | 真空度<br>Vacuum<br>[mH <sub>2</sub> O] | 弯曲半径<br>Bending<br>radius<br>[mm] | 长度<br>Length<br>[m] | 标称重量<br>Weight<br>per meter<br>[g/m] | 每托盘件数<br>Pieces<br>per pallet<br>[pcs] | 尺寸托盘<br>Pallet<br>dimension<br>[cm] |
|--------------------------|-------------|--------------------------------------|---------------------------------------|--------------------------------------|-----------------------------------|---------------------|--------------------------------------|----------------------------------------|-------------------------------------|
| 20                       | ○           | 7                                    | 21                                    | 7                                    | 80                                | 25                  | 160                                  | 24                                     | 80x120                              |
| 25                       | ○           | 7                                    | 21                                    | 7                                    | 100                               | 25                  | 250                                  | 30                                     | 120x120                             |
| 25                       | ○●          | 7                                    | 21                                    | 7                                    | 100                               | 50                  | 250                                  | 24                                     | 120x120                             |
| 32                       | ○           | 7                                    | 21                                    | 7                                    | 100                               | 25                  | 420                                  | 12                                     | 80x120                              |
| 32                       | ●           | 6                                    | 18                                    | 6                                    | 120                               | 25                  | 310                                  | 12                                     | 80x120                              |
| 40                       | ●           | 5                                    | 15                                    | 6                                    | 150                               | 25                  | 465                                  | 16                                     | 120x120                             |
| 50                       | ●           | 5                                    | 15                                    | 7                                    | 165                               | 12                  | 630                                  | 16                                     | 120x120                             |
| 50                       | ○●          | 5                                    | 15                                    | 7                                    | 165                               | 25                  | 630                                  | 12                                     | 80x160                              |
| 50                       | ○●          | 5                                    | 15                                    | 7                                    | 165                               | 50                  | 630                                  | 8                                      | 80x160                              |
| 63                       | ○●          | 4                                    | 12                                    | 7                                    | 220                               | 25                  | 925                                  | 6                                      | 120x100                             |
| 75                       | ○●          | 2,5                                  | 7,5                                   | 6                                    | 400                               | 25                  | 1470                                 | 3                                      | 120x100                             |
| 90                       | ●           | 3                                    | 9                                     | 7                                    | 340                               | 25                  | 1895                                 | 4                                      | 120x120                             |
| 110                      | ●           | 3                                    | 9                                     | 7                                    | 420                               | 25                  | 2330                                 | 3                                      | 160x160                             |

时的爆破压力和工作压力23°C | Working and Bursting pressure at 23°C



符合现行EN ISO 3994标准。

TUV证书编号: Z1 055285 0013, 需定期检查。

In compliance with the EN ISO 3994 current standard.

TUV Certificate No. Z1 055285 0013 subject to periodic checks.

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。

Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1. 符合REACH法规 (EC) 第1907/2006号 / 2. 符合RoHS条例 / 3. 符合AIPGS 2019:01 IPA法规 - 第2类 / 4. 无邻苯二甲酸盐 (含量<0.1%)

Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AIPGS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)