


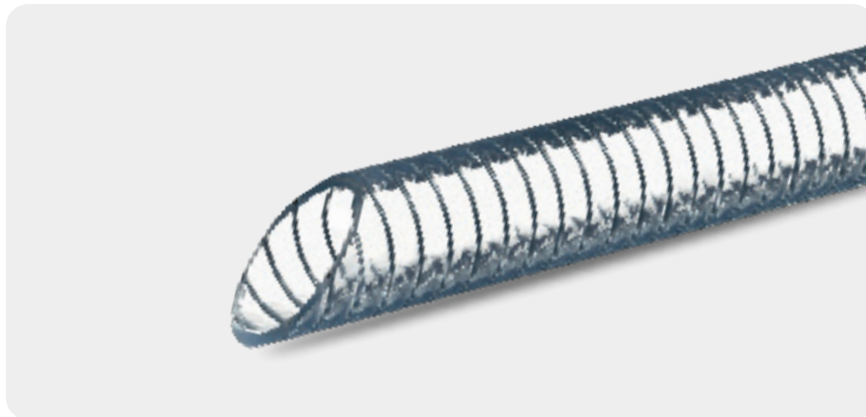

重型工况运输专用管道, 是食品工业、农业、工业生产厂房、海洋和风能部门抽吸和输送物质的理想选择。

FITT Metalflex通过了食品液体认证, 是输送食品的理想选择。它还适用于冷却系统和舱底水排放, 运输空气和树脂时还具有耐真空性。螺旋间距小, 保证了出色的弯曲半径。

结构: 带镀锌螺旋钢管的PVC管。

使用温度: -10°C / +65°C

- 抗压强度高。
- 良好的柔韧性。
- 良好的内部和外部耐磨性。

Heavy-duty hose, ideal for the suction and delivery of substances in the food sector, agriculture, industrial production plants, marine and wind power sectors.

Certified for liquid foods, FITT Metalflex is ideal for the flow of food substances. Also suitable for cooling systems and bilge water discharge, it's resistant to vacuum with air and resins.

The small pitch of the spiral guarantees an excellent bending radius.

Structure: PVC hose with harmonic galvanised steel spiral.

Temperature of use: -10°C / +65°C

- High crushing resistance.
- Good flexibility.
- Good internal and external abrasion resistance.



符合REACH¹
标准
REACH¹
compliant

符合RoHS²
标准
RoHS²
compliant

无IPA³
PAH³
free

无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0.1%



MOCA - 符合欧盟第10/2011号法规
(模拟物A-B-C-D1)

FDA批准CFR 21 - 175.300和177.1210.

FCM - Compliant with European Regulation 10/2011 for Simulants A-B-C-D1.
Compliant with FDA CFR 21 - 175.300 and 177.1210.

FITT METALFLEX

标记 | Marking: FITT METALFLEX Øxx Reg. (EU) 10/2011 A-B-C-D1 FDA CFR 21 175.300 - PHthalate FREE - MADE IN ITALY

内径 Ø internal [mm]	外径 Ø external [mm]	厚度 Thickness [mm]	工作压力 Working pressure [bar]	爆破压力 Bursting pressure [bar]	真空度 Vacuum [mH ₂ O]	弯曲半径 Bending radius [mm]	长度 Length [m]	标称重量 Weight per meter [g/m]	每托盘 件数 Pieces per pallet [pcs]	托盘尺寸 Pallet dimension [cm]
10	16	3	9	27	9	25	30	160	99	120x120
12	18	3	9	27	9	30	30	180	72	120x120
12	18	3	9	27	9	30	60	180	32	120x120
13	19,2	3,1	9	27	9	30	30	190	72	120x120
14	20,4	3,2	8	24	9	30	30	200	72	120x120
16	22,6	3,3	8	24	9	35	30	250	35	120x120
16	22,6	3,3	8	24	9	35	60	250	28	120x120
18	25	3,5	8	24	9	40	30	280	36	120x120
19	26	3,5	7	21	9	40	30	305	32	120x120
20	27,2	3,6	7	21	9	45	30	340	32	120x120
22	29,2	3,6	7	21	9	50	30	400	24	120x120
25	33	4	6	18	9	55	30	510	24	120x120
30	38	4	5	15	9	70	30	600	12	120x120
32	40,2	4,1	5	15	9	75	30	650	16	120x120
35	43,4	4,2	4	12	9	85	30	730	6	120x100
38	47	4,5	4	12	9	90	30	800	6	120x100

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。

Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AFPS GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)

Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AFPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)