
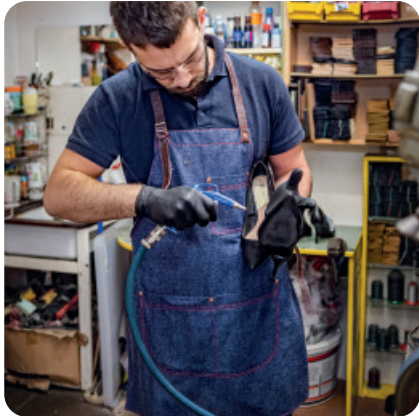


fitt refittex 20bar ultraflex

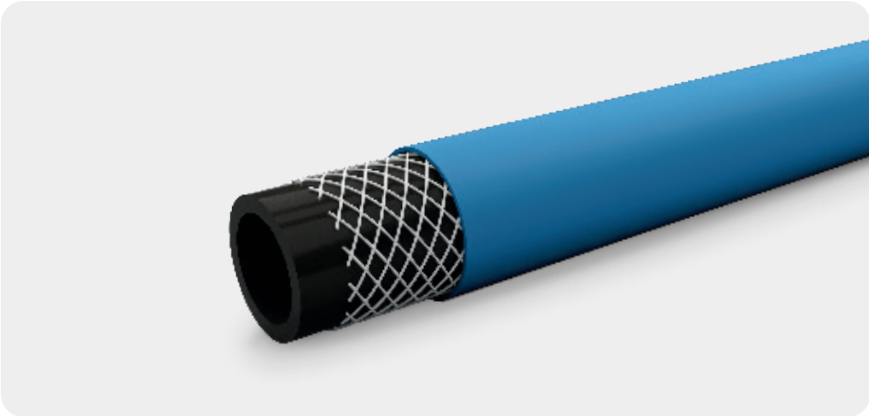

适用于低温环境的压缩空气软管。

FITT Refittex 20bar Ultraflex即使在低温条件下也具有很高的柔韧性,是压力最高20bar的压缩机的理想选择。

结构: 高强度双层聚酯增强的PVC管。

使用温度: -20°C / +60°C

- 即使在低温条件下也具有高柔韧性。
- 另有蓝色可供选择。

Compressed air hose suitable for low temperatures use.

Highly flexible even at low temperatures, FITT Refittex 20bar Ultraflex is ideal for compressors with pressures up to 20bar.

Structure: PVC hose with high tenacity polyester reinforcement.

Temperature of use: -20°C / +60°C

- High flexibility at low temperatures.
- Also available in blue color.



符合REACH¹
标准
REACH¹
compliant



符合RoHS²
标准
RoHS²
compliant



无IPA³
PAH³
free



无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0.1%

FITT REFITTEX 20bar ULTRAFLEX

标记 | Marking: FITT REFITTEX ULTRAFLEX D1xDE WP 20bar/290psi @23°C - MADE IN ITALY

英寸 Inches [inc]	内径 Ø internal [mm]	外径 Ø external [mm]	厚度 Thickness [mm]	工作压力 Working pressure [bar]	爆破压力 Bursting pressure [bar]	弯曲半径 Bending radius [mm]	长度 Length [m]	标称重量 Weight per meter [g/m]	每托盘件数 Pieces per pallet [pcs]	托盘尺寸 Pallet dimension [cm]
1/4"	6	11	2,35	20	60	30	50	77	54	80x120
-	8	13	2,5	20	60	40	100	107	24	80x120
-	9	14,5	2,75	20	60	45	50	128	72	80x120
-	9	14,5	2,75	20	60	45	25	128	72	80x120
-	10	15,5	2,75	20	60	50	50	133	20	80x120
1/2"	13	19	3,15	20	60	65	50	189	10	80x120
3/4"	19	27	4	20	60	100	25	348	20	80x120

时的爆破压力和工作压力23°C | Working and Bursting pressure at 23°C

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。

Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AFPS GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)

Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AFPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)