


fitt refittex gas en 1327

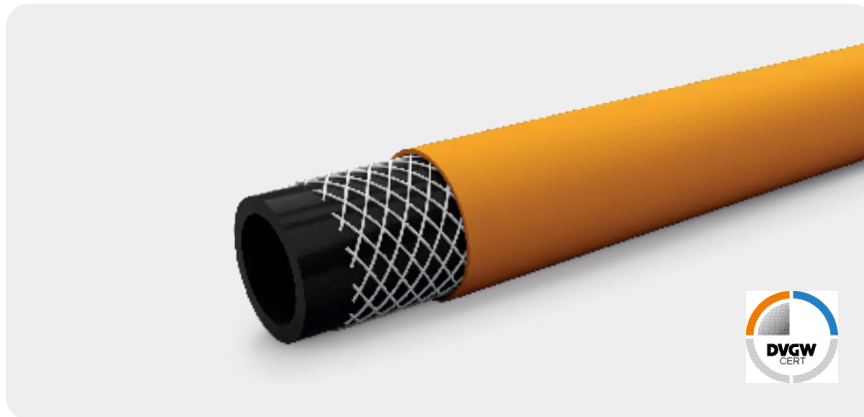

适用于焊枪焊接作业的工业用软管。

FITT Refittex Gas EN 1327软管符合EN 1327标准, 具有高柔韧性和抗外部磨损的特点。适用于可燃氧气焊枪和可燃空气焊枪 (GPL/MPS)。
结构:高韧性聚酯纤维增强PVC管。
使用温度:-30°C / +70°C

- 高柔韧性。
- 良好的抗紫外线性能。

Hose for industrial use, ideal for torch welding.

In compliance with the standard EN 1327, FITT Refittex Gas EN 1327 is flexible and resistant to external abrasions. Suitable for combustible oxygen-gas and combustible air-gas (LPG/MPS) torches.

Structure: PVC hose with high tenacity polyester textile reinforcement.

Temperature of use: -30°C / +70°C

- High flexibility.
- Good UV ray resistance.



符合REACH¹
标准
REACH¹
compliant



符合RoHS²
标准
RoHS²
compliant



无IPA³
PAH³
free



无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0.1%

FITT REFITTEX GAS EN 1327

标记 | Marking: EN 1327 - 2 MPA (20bar) - xmm - FITT REFITTEX GAS - X Q YY - MADE IN ITALY

内径 Ø internal [mm]	外径 Ø external [mm]	厚度 Thickness [mm]	工作压力 Working pressure [bar]	爆破压力 Bursting pressure [bar]	弯曲半径 Bending radius [mm]	长度 Length [m]	标称重量 Weight per meter [g/m]	每托盘件数 Pieces per pallet [pcs]	托盘尺寸 Pallet dimension [cm]
4	11	3,5	As prescribed by EN 1327 - 2Mpa	As prescribed by EN 1327	18	200	105	18	80x120
5	12	3,5	As prescribed by EN 1327 - 2Mpa	As prescribed by EN 1327	20	100	123	42	80x120

时的爆破压力和工作压力23°C | Working and Bursting pressure at 23°C

可根据要求提供最大为10x20mm的其他直径 | Other diameters up to 10x20mm available on request



符合德国DIN EN 1327标准的DVGW认证。

DVGW certification according to the DIN EN 1327
German standard.

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。

Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AFPS GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)

Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AFPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)