




FITT refittex acetylene / oxygen

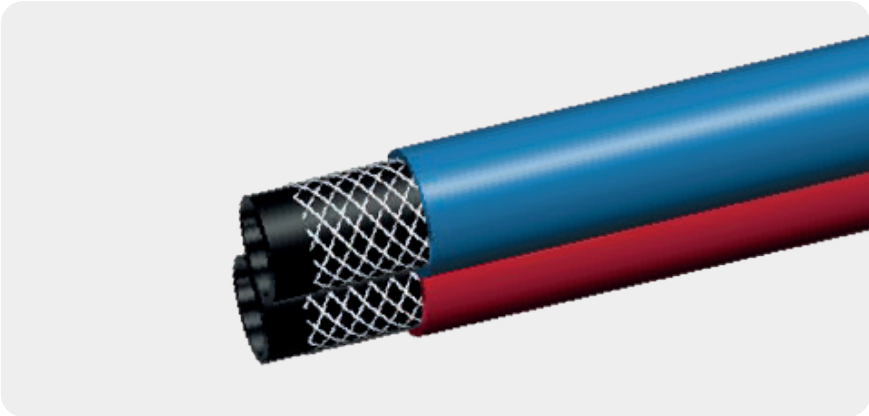

为焊机提供乙炔/氧气的软管。采用特别PVC化合物制成并加上织物增强的软管。

- 柔韧性
- 光滑度
- 耐臭氧
- 工作温度 (15°C/+50°C)

Hose for acetylene/oxygen supply for welding machines. Hose made-up of a special PVC compound with textile reinforcement.

- Crush resistance
- Smooth surface
- Ozone resistance
- Working temperature (15°C/+50°C)



符合REACH¹
标准
REACH¹
compliant



符合RoHS²
标准
RoHS²
compliant



无IPA³
PAH³
free



无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0,1%

FITT REFITTEX ACETYLENE / OXYGEN						
内径 Ø inside	外径 Ø outside	壁厚 Thickness	工作压力 Working pressure	爆破压力 Bursting pressure	长度 Length	每米重量 Weight per meter
8	15	3,5	20	60	50	160
时的爆破压力和工作压力23°C Working and Bursting pressure at 23°C						

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。
Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AfPS GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)
Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AfPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free(<0.1% weight/weight)