


fitt refittex 20bar

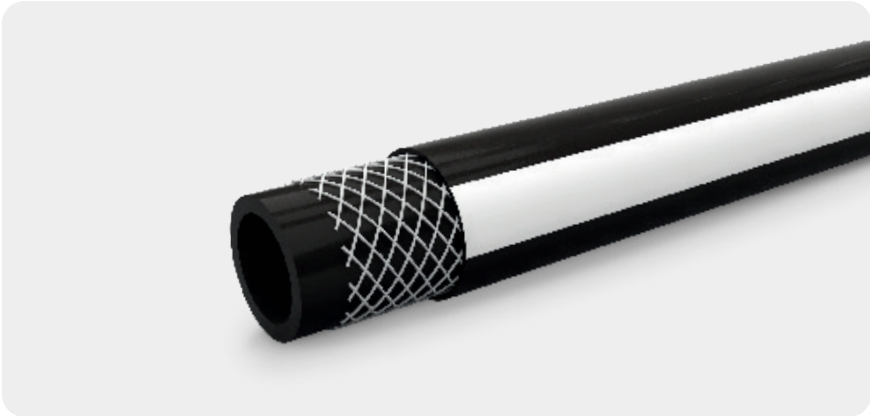

用于工业和农业的压缩空气和水管，
耐压高达20 bar。

FITT Refittex 20bar非常适合用于压缩机，适用于输送压缩空气、水、防霉溶液、杀虫剂和肥料。
结构：高韧性聚酯纤维增强的PVC软管。
使用温度：-20°C / +60°C

- 极强的外部耐磨性。
- 抗化学侵蚀能力强

Compressed air and water hose for industrial and agricultural use, for use with pressures up to 20bar.

Ideal for compressors, FITT Refittex 20bar is suitable for the flow of compressed air, water, fungicide solutions, pesticides and fertilisers.
Structure: PVC hose with high tenacity polyester reinforcement.
Temperature of use: -20°C / +60°C

- High external abrasion resistance.
- High chemical aggression resistance.

REACH
COMPLIANT

符合REACH¹
标准
REACH¹
compliant

RoHS
COMPLIANT

符合RoHS²
标准
RoHS²
compliant

PAH
FREE

无IPA³
PAH³
free

无邻苯二甲酸盐⁴
含量<0.1%
Phthalate free⁴
formulation <0.1%

FITT REFITTEX 20bar

标记 | Marking: FITT REFITTEX DlxDE WP 20bar/290psi @23°C - MADE IN ITALY

英寸 Inches [inc]	内径 Ø internal [mm]	外径 Ø external [mm]	厚度 Thickness [mm]	工作压力 Working pressure [bar]	爆破压力 Bursting pressure [bar]	弯曲半径 Bending radius [mm]	长度 Length [m]	标称重量 Weight per meter [g/m]	每托盘件数 Pieces per pallet [pcs]	托盘尺寸 Pallet dimension [cm]
1/4"	6	11	2,5	20	60	25	50	87	60	80x120
1/3"	8	13	2,5	20	60	32	25	104	80	80x120
1/3"	8	13	2,5	20	60	32	50	104	54	80x120
1/3"	8	13	2,5	20	60	32	100	104	30	80x120
3/8"	10	15	2,5	20	60	45	25	125	72	80x120
3/8"	10	15	2,5	20	60	45	50	125	36	80x120
3/8"	10	15	2,5	20	60	45	100	125	20	80x120
1/2"	13	19	3	20	60	52	25	190	48	80x120
1/2"	13	19	3	20	60	52	50	190	30	80x120
1/2"	13	19	3	20	60	52	100	190	10	80x120
5/8"	16	23	3,5	20	60	65	50	270	20	80x120
3/4"	19	26	3,5	20	60	90	50	312	10	80x120
1"	25	33	4	20	60	135	50	460	8	80x120

时的爆破压力和工作压力23°C | Working and Bursting pressure at 23°C

内径和相应公差符合现行UNI EN ISO 1307标准。长度公差为±5%。
Inner diameters and corresponding tolerances according to the current standard UNI EN ISO 1307. The length tolerance is ± 5%.

法规符合性说明: 1.符合REACH法规 (EC) 第1907/2006号 / 2.符合RoHS条例 / 3.符合AIPs GS 2019:01 IPA法规 - 第2类 / 4.无邻苯二甲酸盐 (含量<0.1%)
Regulatory compliance legend: 1. REACH Regulation (EC) n. 1907/2006 / 2. RoHS Directive / 3. AfPS GS 2019:01 Regulation IPA - Category 2 / 4. Phthalate free (<0.1% weight/weight)